

## REACH-IN REFRIGERATORS

MODEL:  MXCR-23FD-50  MXCR-49FD-50



MXCR-23FD-50



MXCR-49FD-50

Maxx Cold Reach-In Refrigerators store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Refrigerators are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

### FEATURES AND CONSTRUCTION

- Constructed of a durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

### NOMINAL STORAGE CAPACITY

MXCR-23FD-50 .....	18 Cu Ft (510 L)
MXCR-49FD-50HC .....	40 Cu Ft (1133 L)

### TEMPERATURE

Holding temperature ..... 34°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

### ELECTRIC

230V / 50Hz / 1Ph


### 3RD PARTY APPROVALS




MXCR-23FD-50

MXCR-49FD-50


FRONT VIEW

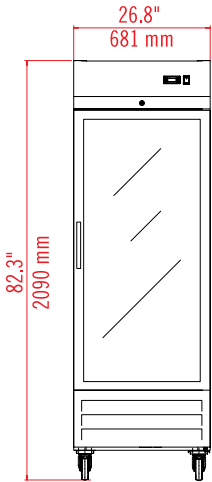


SIDE VIEW

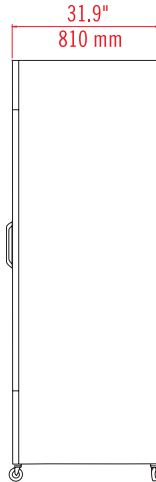


FRONT VIEW

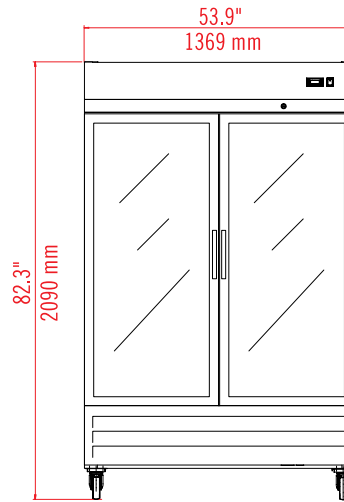


SIDE VIEW

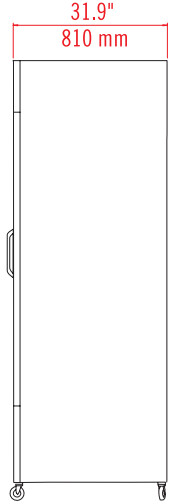

TOP VIEW



TOP VIEW



MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXCR-23FD-50	26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm)	22 x 27.5 x 50" (564 x 700 x 1276 mm)	18 Cu Ft (510 L)	34°F to 41°F (1°C to 5°C)	3A	311 lbs (143 kg)	R-134A 11.99 oz (340 g)	1 / 3	230V / 50Hz / 1Ph
MXCR-49FD-50	53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm)	49 x 27.5 x 50" (1254 x 700 x 1276 mm)	40 Cu Ft (1133 L)	34°F to 41°F (1°C to 5°C)	4A	536 lbs (244 kg)	R-134A 18.69 oz (530 g)	2 / 6	230V / 50Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit