



A BRAMA KITCHEN, A COMPLETE KITCHEN



BRAMA 22 CU. FT COUNTER DEPTH FRENCH DOOR REFRIGERATOR

BRFDR22C01SS




The Brama 22 cu.ft counter depth French-door stainless steel fridge blends style and functionality seamlessly. At the heart of this refrigerator is an automatic icemaker with a spacious storage bin, ensuring you'll never run out of ice.

This spacious unit features six door bins with gallon storage, two freezer drawers, and adjustable glass shelves which ensure efficient organization.

The Brama 22 cu. ft French-door fridge makes a stylish addition to any kitchen.

- This unit features an external water dispenser and an ice maker with storage bin.
- This unit features 4 adjustable cantilever glass shelves with a folding shelf to store taller items.
- With bright white LED lighting in fridge and freezer compartments you're never left guessing what's inside.

SPECIFICATIONS

Installation Type:	Built-In or Freestanding
Weight:	300 lbs
Dimensions:	35 3/4"W x 28.74"D x 70.2"H
Dispenser:	Icemaker with storage bin External Water dispenser
Lighting:	White LED in fridge and freezer section
Electronic Specs:	110V / 60Hz
Temp Range:	34 - 44°F (Fridge), -8 - 9°F (Freezer)
Capacity:	22.4 cu. Ft.
Certifications:	 Energy Verified Rendement Énergétique Vérifié  



 PBX (246) 537-0790

 www.esscoonline.com

 @esscobarbados


 Electric Sales & Service Ltd.



A BRAMA KITCHEN, A COMPLETE KITCHEN

BRAMA 22 CU. FT COUNTER DEPTH FRENCH DOOR REFRIGERATOR

BRFDR22C01SS

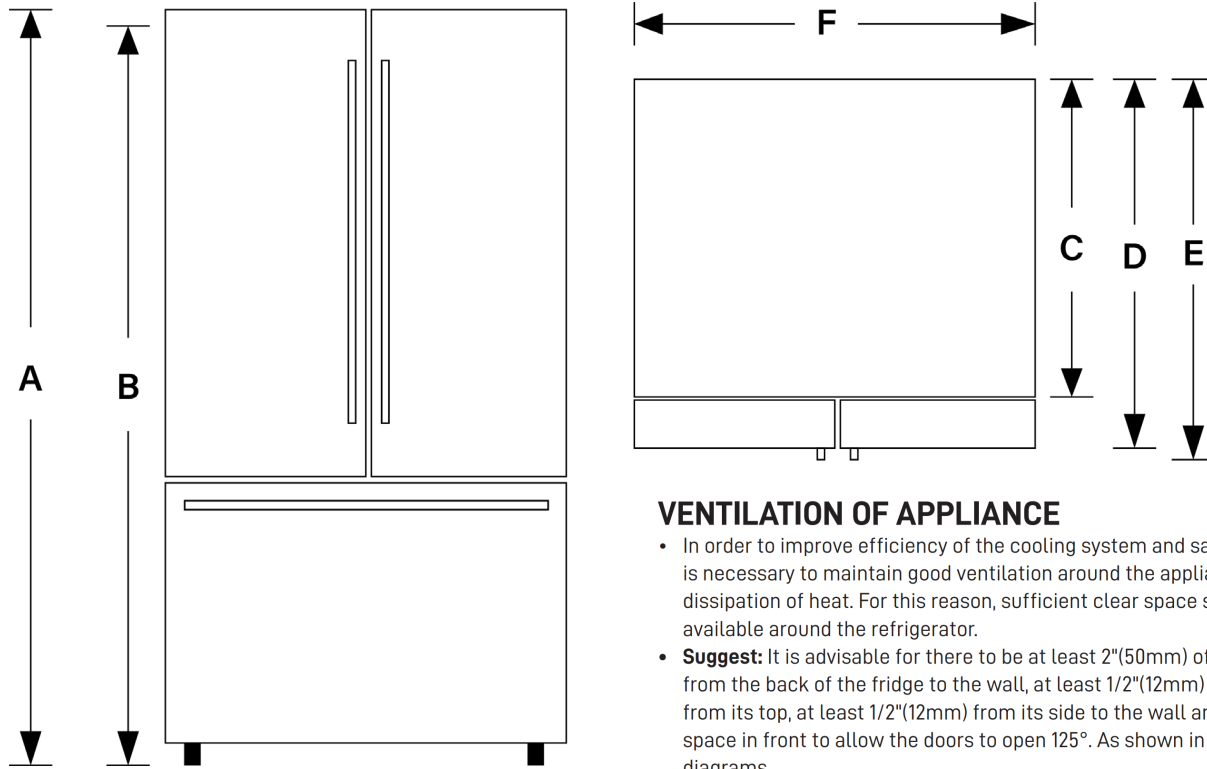

VENTILATION OF APPLIANCE

- In order to improve efficiency of the cooling system and save energy, it is necessary to maintain good ventilation around the appliance for the dissipation of heat. For this reason, sufficient clear space should be available around the refrigerator.
- **Suggest:** It is advisable for there to be at least 2"(50mm) of clearance from the back of the fridge to the wall, at least 1/2"(12mm) of clearance from its top, at least 1/2"(12mm) from its side to the wall and a clear space in front to allow the doors to open 125°. As shown in the following diagrams.

OVERALL DIMENSIONS	Height to top of hinge (in.) A	70-13/64
	Height to top of case (in.) B	---
	Case depth without door (in.) C	24-1/64
	Case depth with door (in.) D	28-47/64
	Case depth with door handles (in.) E	---
	Width (in.) F	35-3/4
AIR CLEARANCES	Each side (in.)	1/2
	Top (in.)	1/2
	Back (in.)	2

